


FIG.9

X


52
51
43
42
42

FIG.10

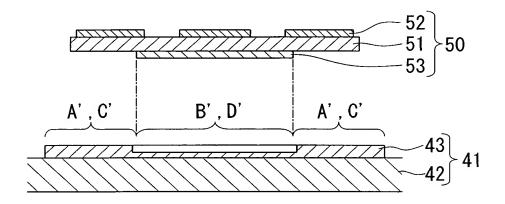

$UNIT: g/cm^2$	Д	120	18			
TIN	009	206	186			
	540	260	160			Ľ.
	480	406	180	2	R	600 min.
	420	410	196	N RES		540
	360	464	198	RESI		480
	300	494	194	→—SILICONE RESIN →—FLUORINE BASED RESIN	-	
	240	492	186			420
	180	558	190			360
	120	552	152			300
	09	584	182			240
	0	402	146			180
FIG.11	HEATING TIME (min.)	SILICONE RESIN	FLUORINE-BASED RESIN	g/cm ² 700 600 500 400	200	DEFORE 60 120 HFATING

FIG.12

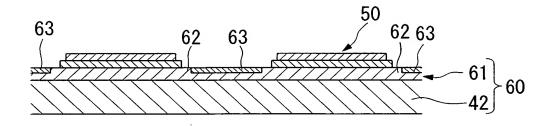

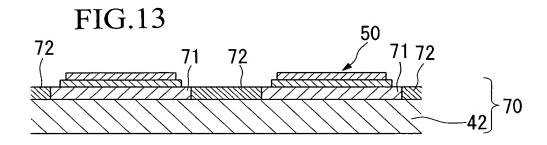


FIG.14

83

82

83

82

83

82

81

80

80